



Dart Hawkesbury
1270 Aberdeen St Hawkesbury, ON K6A 1K7 Canada
Tel (613) 632-5200
Fax 613 632-5246

Print

Purchasing Receipts

PO No	Supplier	Line Item No	Rel No	Terms	Purchased Item	Description	For Part No	Project	Equipment ID	Order Qty	Due Date	Received Quantity	Accounting Job No	Container No	Status	Receive Date	Price/Unit	Aging Days	Past Due	Total	Supplier Name
PO040848	MCM001-VU	2	1	2% 10 Net 30	6546K56	Rectangular Tube, 1/8" wall, 1-1/4" High x 1-1/4" wide				20	8/29/2018	18		S107379	Stock	8/31/2018	\$ 26.16 / Ea	0		\$470.88	McMaster-Carr Supply Co,
										Total:	20	18									\$470.88

Plex 8/31/2018 11:11 AM dart.Tollis.Andrew



Dart Aerospace Ltd.
1270 Aberdeen St
Hawkesbury, ON
K6A 1K7
Canada

Tel (613) 632-5200

PURCHASE ORDER PO040848

Supplier: MCM001-VU
McMaster-Carr Supply Co.
P.O. Box 7690
Chicago, IL 60680-7690 USA
Phone: 330 995 5500
Fax: 330 995 9600

Ship To: 1270 Aberdeen Street
Hawkesbury
ON
K6A 1K7 Canada
Phone: 613-632-5200

PO No: PO040848

PO Date: 8/27/18

Due Date: 8/29/18

**Purchase Order
Revision:**

Revision Date:

Ship-To Contact: Lavoie, Chantal
clavoie@dartaero.com

Via: Ground

Pymt Terms: 2% 10 Net 30

Freight Terms:

Special Comments:

Items

Line Item	Job	Part	Supplier Part No	Description	Status	Account	Due Date	Order Quantity	Received Quantity	Balance	Unit Price (USD)	Extended Price
1	182436	59915K274		Rod End Bearing D4777-1	Firmed	-	8/29/18	20 pcs	0 pcs	20 pcs	\$17.14/pcs	\$342.80
2		6546K56	3 ft long	Rectangular Tube, 1/8" wall, 1-1/4" High x 1-1/4" wide	Firmed	-	8/29/18	20 Ea	0 Ea <i>16x</i>	20 Ea <i>At 18/08/131</i>	\$26.16/Ea	\$523.20
Line Item Note to use on part RBE350A93-3302-02-5												
3	182496	6718K52		Fitting, Quick Disconnect D4182-1	Firmed	-	8/29/18	10 pcs	0 pcs	10 pcs	\$5.64/pcs	\$56.40
4		93635A446	5/pk	Hex Head Cap Screw receive ea	Firmed	-	8/29/18	10 Ea	0 Ea	10 Ea	\$1.682/Ea	\$16.82
5	182497	D2484P	91343A100 10/pk	Lock Nut : Various STC's	Firmed	-	8/29/18	40 pcs	0 pcs	40 pcs	\$0.363/pcs	\$14.52
6		M6061T6TR1.5X1.0W125	6546K999	6061-T6 Rect Tube 1.5 X 1.0 X .125W : MATERIAL: 6061-T6 OR 6061-T651/T6510/T6511/T62 RECTANGULAR TUBING PER AMS-QQ-A-225/8 OR AMS 4117/4128/4115/4116 OR PER AMS-QQ-A-200/8 OR AMS 4160 receive ft	Firmed	-	8/29/18	24 ft	0 ft	24 ft	\$5.8333/ft	\$140.00
7	182522	63215K34		Bearing	Firmed	-	8/29/18	50 Ea	0 Ea	50 Ea	\$17.24/Ea	\$862.00
Grand Total:											\$1,955.74	

Order Notes

Plex 8/27/18 1:40 PM dart.lavoie.chantal

Order Notes

Procurement Quality Clauses

A005 RIGHT OF ENTRY

A016 PERSONNEL QUALIFICATION

A026 CERTIFICATION OF MATERIAL CONFORMANCE

A032 DOCUMENT SPECIAL REQUIREMENTS

A033 STATEMENT OF CONFORMITY/TEST RECORDS FOR NAS, AN and MS FASTENERS

A040 NOTIFICATION OF QUALITY ESCAPE

A041 QUALITY MANAGEMENT SYSTEM

A042 DART NOTIFICATION BY SUPPLIER

A043 RETENTION OF QUALITY DOCUMENTS

A048 COUNTERFEIT PARTS AVOIDANCE, DETECTION, MITIGATION AND DISPOSITION PROGRAM

A049 SUPPLIER AWARENESS


Terms & Condition of Purchasing(Suppliers) and Procurement Quality Clauses are an integral part of our AS9100 requirements. To learn in detail, please visit www.dartaerospace.com for further explanation.

Plex 8/27/18 1:40 PM dart.lavoie.chantal

6061 Aluminum Rectangular Tube

1/8" Wall Thickness, 1-1/4" High x 1-1/4" Wide

6546K56

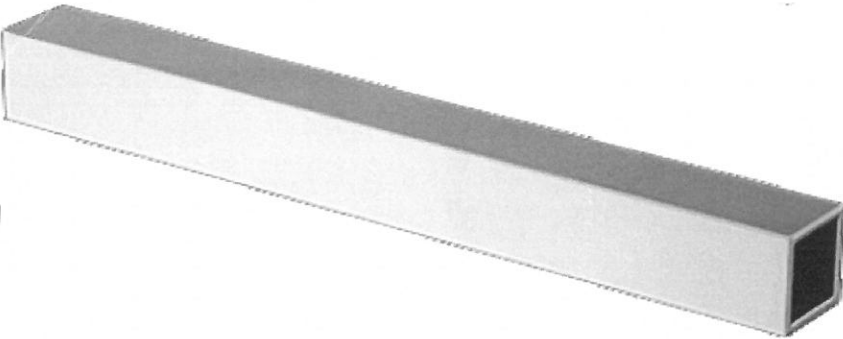

* 20 pcs. of 3ft.
each.

Material	6061 Aluminum
Cross Section Shape	Rectangle
Corner Shape	
Inside	Square
Outside	Round
Construction	Hollow
Appearance	Plain
Wall Thickness	1/8"
Wall Thickness Tolerance	-0.015" to 0.015"
Tolerance Rating	Standard
Outside	
Height	1 1/4"
Height Tolerance	-0.085" to 0.085"
Width	1 1/4"
Width Tolerance	-0.085" to 0.085"
Inside	
Height	1"
Width	1"
Yield Strength	35,000 psi
Fabrication	Heat Treated
Temper	T6
Hardness	Brinell 80
Hardness Rating	Soft
Heat Treatable	Yes
Temperature Range	-320° to 300° F
Specifications Met	ASTM B221
Straightness Tolerance	Not Rated
Magnetic Properties	Nonmagnetic
Density	0.1 lbs./cu. in.
Surface Resistivity	25 Ohm-Cir Mil/ft
Melting Point Temperature	1080° F

Modulus of Elasticity	10.0 ksi × 10 ³
Thermal Conductivity	1,390 Btu/hr. × in./sq. ft./°F @ 75° F
Elongation	12.5%
Material Composition	
Aluminum	95.1-98.2%
Chromium	0.4-0.8%
Copper	0.05-0.4%
Iron	0-0.7%
Magnesium	0.8-1.2%
Manganese	0-0.15%
Nickel	0-0.05%
Silicon	0.4-0.8%
Titanium	0-0.15%
Zinc	0-0.25%
Zirconium	0-0.25%
Other	0.15%
Length Tolerance	-1/4" to 1/4"
Length	1/2 ft., 1 ft., 2 ft., 3 ft., 6 ft.
RoHS	Compliant

Often fabricated into vehicle parts, pipe fittings, and containers, 6061 is stronger and offers better corrosion resistance than MIC6 and 2011. It's also nonmagnetic, heat treatable, and resists stress cracking.



200 Aurora Industrial Pkwy
Aurora OH 44202-8087
330-995-5500
cle.sales@mcmaster.com

Dart Aerospace Ltd
1270 Aberdeen St
Hawkesbury ON K6A 1K7
Canada

Purchase Order
PO040848
Order Placed By
Chantal Lavoie

McMaster-Carr Number
8296121-03

Page 1 of 1
08/27/2018

Line	Product	Ordered	Shipped
2	6546K56 6061 Aluminum Rectangular Tube, 1/8" Wall Thickness, 1-1/4" High x 1-1/4" Wide, 3 Feet Long	20 Each	18

Shipped separately from our Chicago warehouse on 08/27

2	6546K56 6061 Aluminum Rectangular Tube, 1/8" Wall Thickness, 1-1/4" High x 1-1/4" Wide, 3 Feet Long	20 Each	2
---	--	------------	---

Expected to ship

6	6546K999 Extruded 6061-T6 Aluminum Rectangle Tubing, , 1" X 1.5" X .125" Wall, 6' Length with Mtr, ** AMS-Qq-A-225/8 or AMS 4117/4128/4115/4116 **, ** or Per AMS-Qq-A200/8 or AMS 4160 **	24 Feet	24 Sep 4-10
---	---	------------	-------------